

Pass-through warewasher
ValueLine P50

winterhalter

High Performance to the Core



Excellent results in the shortest time

The ValueLine P50 delivers excellent cleaning results quickly and effectively. It is easy to operate and users can trust in its level of efficiency, hygiene and reliability. This makes the P50 extremely attractive for professionals in search of an economical and practical solution for their growing warewashing needs.



Easy to operate

- Clear colour-coded digital display
- 2 wash programmes
- Digital tank and boiler temperature display
- Error management system with pictograms and error logbook
- Thermostop controlled rinse temperature
- Automatic hood start
- Self-cleaning programme



Excellent results and hygienic design

- Rotating top and bottom wash system for optimum coverage
- Triple filtration system ensures extended lifecycle of tank water
- Wash and rinse arms easily removable by hand for cleaning
- Deep drawn tank for optimal hygiene
- Hygiene rack guide



Economical to run

- Short wash cycle
- Reduced heating time
- Low total connected load at 3-ph 20 Amp
- Low fresh water consumption
- Optional integrated waste water heat exchanger with additional 1.7kW heating power helps to save energy costs


Technical Data

P50		
Number of programmes		2
Theoretical capacity (Standard/High Temp)	[racks/h]	60/20
Rack dimensions	[mm]	500 x 500
Tank capacity	[l]	28
Tank temperature	[°C]	62
Tank heating	[kW]	2.5
Boiler heating	[kW]	9.0
Rinse water consumption	[l/rack]	2.4
Final rinse temperature	[°C]	85
Circulating pump		
– Volume circulated	[l/min]	210
– Output (p1)	[kW]	0.6
Noise emission	[dB(A)]	max. 63
Splash guard		IP X3
Minimum flow pressure	[kPa/bar]	100/1.0
Maximum inlet pressure	[kPa/bar]	600/6.0
Rate of flow	[l/min]	min. 4
Water inlet temperature	[°C]	max. 60
Weight (net/gross)	[kg]	98/123
Packaging dimensions (W x D x H)	[mm]	770 x 880 x 1605

Electrical specifications

Supply	Fuse	Total connected load
400 V/3N~/50–60 Hz	16 A	9.3 kW
	20 A	11.8 kW
230 V/3N~/50–60 Hz	25 A	9.3 kW
	32 A	11.8 kW

Dimensions

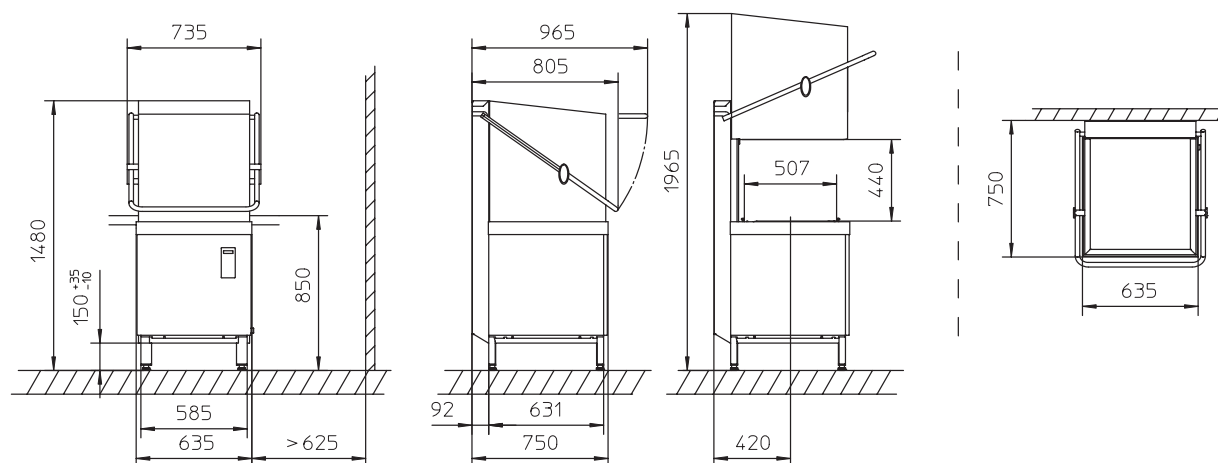

winterhalter

Winterhalter India Pvt Ltd

1st Floor, 43 Community Centre,
Naraina Industrial Area Phase I
New Delhi – 110028

India

Tel.: +91 114 250 2223

www.winterhalter.in