



# Built-In Solutions

*Cafeterias • Buffets*  
*Supermarkets & Delis • Restaurants & Cafés*



**CSSBF-48-S** in optional Bermuda Sand built into a Bermuda Sand Simulated Stone countertop *pg. 2*



**GRSSB-3618** in standard Night Sky Simulated Stone *pg. 7*



**HBGB-3618** shown below a **GR2AHL-42** with *Designer* non-adjustable stands and optional sneeze guards built into a Simulated Stone countertop *pg. 8*



**GRSB-30-I** Glo-Ray® Built-In Heated Shelf with Recessed Top and accessory food pans shown below a **GRAHL-36** with adjustable tubular stands and optional sneeze guards *pg. 9*



**GRSB-54-I** with Recessed Top and accessory food pans shown below a **GRAL-96D** with optional sneeze guard *pg. 9*



**GRSBF-60-0** Glo-Ray® Built-In Heated Shelf with Flush Top, built into a Bermuda Sand Simulated Stone countertop with accessory food pans shown below a **GR2AL-96D** in *Designer* Black with optional sneeze guards *pg. 10*



### Cold Simulated Stone Shelves Built-In

Hatco's new Cold Simulated Stone Shelves are a must for buffet lines in cafeterias, restaurants and much more! These sturdy, foodsafe shelves are available in three attractive Simulated Stone colors.

- Thermal break reduces condensation and temperature transfer (patent pending)
- CSSB Cold Simulated Stone Built-In Shelves match the GRSSB Heated Simulated Stone Built-In Shelves for a fully integrated look
- Control box can be mounted on the front of the cabinet, 4' from center of shelf
- Condensing unit may be mounted up to 4' away from the center of shelf
- Models shipped with Electronic Temperature Control and condensing unit
- Shelf construction utilizes R-404A refrigerant keeping food product cold
- Easy serviceability with a sight glass, service valves, dryer/filter and a receiver. Long, flexible refrigerant line (ability to pullout condensing unit) for service
- Models with Simulated Stone are Swanstone®



**CSSB-4818**  
in Bermuda Sand  
Simulated Stone



**CSSBF-48-S**  
in Gray Granite  
Simulated Stone



#### COLD SIMULATED STONE SHELVES BUILT-IN

Model	Dimensions	Voltage	Watts	Approx. Ship Weight
	W x D	Single Phase		
CSSB-2418	24" x 18"	120	804	130 lb.
CSSB-3018	30" x 18"	120	804	145 lb.
CSSB-3618	36" x 18"	120	804	160 lb.
CSSB-4818	48" x 18"	120	1044	185 lb.

**All Cold Simulated Stone Shelf Built-In Models Feature:**  
Electronic Temperature Control and condensing unit.

#### COLD SIMULATED STONE SHELVES BUILT-IN FLUSH TOP


Model	Dimensions	Voltage	Watts	Approx. Ship Weight
	W x D	Single Phase		
CSSBF-24-F	24" x 15½"	120	804	115 lb.
CSSBF-24-I	24" x 19½"	120	804	122 lb.
CSSBF-24-S	24" x 24"	120	804	130 lb.
CSSBF-36-F	36" x 15½"	120	804	138 lb.
CSSBF-36-I	36" x 19½"	120	1044	146 lb.
CSSBF-36-S	36" x 24"	120	1044	158 lb.
CSSBF-48-F	48" x 15½"	120	1044	170 lb.
CSSBF-48-I	48" x 19½"	120	1044	182 lb.
CSSBF-48-S	48" x 24"	120	1380	195 lb.

**All Cold Simulated Stone Shelf Built-In Flush Top Models Feature:**  
Electronic Temperature Control, condensing unit, 6' cord and plug (NEMA 5-15P).

#### COUNTERTOP CUTOUT DIMENSIONS

Model	Width	Depth
	with ⅜" radii	with ⅜" radii
CSSB-2418	24⅜"	18⅜"
CSSB-3018	30⅜"	18⅜"
CSSB-3618	36⅜"	18⅜"
CSSB-4818	48⅜"	18⅜"
CSSBF-24-F	24⅜"	15⅞"
CSSBF-24-I	24⅜"	19⅞"
CSSBF-24-S	24⅜"	24¾"
CSSBF-36-F	36⅜"	15⅞"
CSSBF-36-I	36⅜"	19⅞"
CSSBF-36-S	36⅜"	24¾"
CSSBF-48-F	48⅜"	15⅞"
CSSBF-48-I	48⅜"	19⅞"
CSSBF-48-S	48⅜"	24¾"
Model	Width	Height
Control Box	9½"	7¾"

#### OPTIONS AND ACCESSORIES – PAGE 4

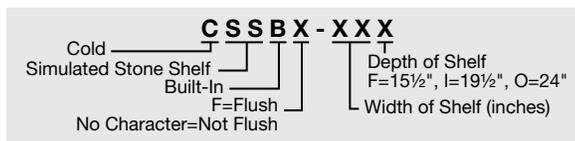

ONE YEAR, ON-SITE PARTS AND LABOR WARRANTY. AN ADDITIONAL FOUR YEAR EXTENDED PARTS ONLY WARRANTY ON THE COMPRESSOR AVAILABLE AT THE TIME OF UNIT PURCHASE.

## Hot/Cold Shelves Built-In

Give your operation ultimate flexibility with Hatco's innovative Hot/Cold Shelves Built-In (patent pending). Available in our signature Aluminum Hardcoat or in Simulated Stone, they easily transition between a heated to cold and cold to heated shelf!

- Thermal break reduces condensation and temperature transfer (patent pending)
- Shelves change modes from hot to cold or vice versa in as little as 30 minutes, allowing quick change for different day parts
- Hardcoat aluminum models (HCSBF) are top mount while Simulated Stone models (HCSSB, HCSSBF) are bottom mount, flush with counter top
- Control box and the condensing unit may be mounted on the front of the cabinet, 4' from center of shelf
- The flush mount control comes standard with a 4' lead wire
- For an integrated look:
  - HCSBF Hot/Cold Shelves match the GRSBF Heated Built-In Shelves
  - HCSSB Hot/Cold Shelves match the GRSSB Heated Built-In Shelves
  - HCSSBF Hot/Cold Shelves match the GRSSBF Heated Built-In Shelves
- Models with Simulated Stone are Swanstone®

Continued on next page...



**HCSSB-4818**  
in Bermuda Sand  
Simulated Stone



**HCSSBF-48-S**  
in Night Sky  
Simulated Stone



### HOT/COLD SIMULATED STONE SHELVES BUILT-IN

Model	Dimensions W x D	Voltage		Approx. Ship Weight
		Single Phase	Watts	
<b>HCSSB-2418</b>	24" x 18"	120	804	130 lb.
<b>HCSSB-3018</b>	30" x 18"	120	804	145 lb.
<b>HCSSB-3618</b>	36" x 18"	120	804	160 lb.
<b>HCSSB-4818</b>	48" x 18"	120	1044	185 lb.

**All Hot/Cold Simulated Stone Shelf Built-In Models Feature:**  
Electronic Temperature Control and condensing unit.

### HOT/COLD SIMULATED STONE SHELVES BUILT-IN FLUSH TOP


Model	Dimensions W x D	Voltage		Approx. Ship Weight
		Single Phase	Watts	
<b>HCSSBF-24-F</b>	24" x 15½"	120	804	139 lbs.
<b>HCSSBF-24-I</b>	24" x 19½"	120	804	146 lbs.
<b>HCSSBF-24-S</b>	24" x 24"	120	804	153 lbs.
<b>HCSSBF-36-F</b>	36" x 15½"	120	804	160 lbs.
<b>HCSSBF-36-I</b>	36" x 19½"	120	1044	167 lbs.
<b>HCSSBF-36-S</b>	36" x 24"	120	1044	180 lbs.
<b>HCSSBF-48-F</b>	48" x 15½"	120	1044	196 lbs.
<b>HCSSBF-48-I</b>	48" x 19½"	120	1044	203 lbs.
<b>HCSSBF-48-S</b>	48" x 24"	120	1380	220 lbs.

**All Hot/Cold Simulated Stone Shelf Built-In Flush Top Models Feature:**  
Electronic Temperature Control, condensing unit, 6' cord and plug (NEMA 5-15P).

### COUNTERTOP CUTOUT DIMENSIONS

Model	Width	Depth
	with ⅜" radii	with ⅜" radii
<b>HCSSB-2418</b>	24⅞"	18⅞"
<b>HCSSB-3018</b>	30⅞"	18⅞"
<b>HCSSB-3618</b>	36⅞"	18⅞"
<b>HCSSB-4818</b>	48⅞"	18⅞"
<b>HCSSBF-24-F</b>	24⅞"	15⅞"
<b>HCSSBF-24-I</b>	24⅞"	19⅞"
<b>HCSSBF-24-S</b>	24⅞"	24⅞"
<b>HCSSBF-36-F</b>	36⅞"	15⅞"
<b>HCSSBF-36-I</b>	36⅞"	19⅞"
<b>HCSSBF-36-S</b>	36⅞"	24⅞"
<b>HCSSBF-48-F</b>	48⅞"	15⅞"
<b>HCSSBF-48-I</b>	48⅞"	19⅞"
<b>HCSSBF-48-S</b>	48⅞"	24⅞"
<b>Control Box</b>	14⅝"	7¾"

### OPTIONS AND ACCESSORIES – PAGE 4

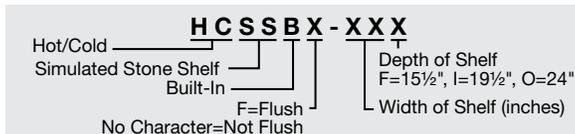

ONE YEAR, ON-SITE PARTS AND LABOR WARRANTY. AN ADDITIONAL FOUR YEAR EXTENDED PARTS ONLY WARRANTY ON THE COMPRESSOR AVAILABLE AT THE TIME OF UNIT PURCHASE.



**Hot/Cold Shelves Built-In**  
*continued*

- Models shipped with Electronic Temperature Control and condensing unit
- The shelf construction utilizes R-404A refrigerant keeping food product cold
- Easy serviceability with a sight glass, service valves, dryer/filter and a receiver
- Long, flexible refrigerant line (ability to pullout condensing unit) for service



**HCSBF-48-S**



**HOT/COLD SHELVES BUILT-IN FLUSH TOP (Aluminum Hardcoat)**

Model	Dimensions W x D	Voltage		Approx. Ship Weight
		Single Phase	Watts	
HCSBF-24-F	24" x 15½"	120	804	119 lbs.
HCSBF-24-I	24" x 19½"	120	804	126 lbs.
HCSBF-24-S	24" x 24"	120	804	133 lbs.
HCSBF-36-F	36" x 15½"	120	804	140 lbs.
HCSBF-36-I	36" x 19½"	120	1044	148 lbs.
HCSBF-36-S	36" x 24"	120	1044	160 lbs.
HCSBF-48-F	48" x 15½"	120	1044	172 lbs.
HCSBF-48-I	48" x 19½"	120	1044	185 lbs.
HCSBF-48-S	48" x 24"	120	1380	204 lbs.

**All Hot/Cold Shelf Built-In Flush Top Models Feature:**  
Electronic Temperature Control and condensing unit, 6' cord and plug (NEMA 5-15P).

**OPTIONS** (available at time of purchase only)

**Simulated Stone Colors (CSSBF, CSSB, HCSSBF, HCSSB Models only) – Non-standard colors are non-returnable – Night Sky Standard –**

<b>SS-GGRAN</b>	Gray Granite
<b>SS-BSAND</b>	Bermuda Sand
<b>SS-NSKY</b>	Night Sky

**EWC** Additional four year extended parts only warranty on the Compressor available at the time of unit purchase

**ACCESSORIES** (available for purchase at any time)

**Self-Adhesive Silicone Gasket (CSSBF, CSSB, HCSSBF, HCSSB Models only) –**

<b>SILGASK</b>	Gasket only - 18"
<b>SILGASK-SBK</b>	Gasket with Black Silicone Caulk
<b>SILGASK-SGRY</b>	Gasket with Gray Silicone Caulk

**COLORS AND FINISHES – PAGE 11**

**COUNTERTOP CUTOUT DIMENSIONS**

Model	Width		Depth	
	Minimum	Maximum	Minimum	Maximum
HCSBF-24-F	24 <sup>5</sup> / <sub>8</sub> "	25"	16"	16½"
HCSBF-24-I	24 <sup>5</sup> / <sub>8</sub> "	25"	20"	20½"
HCSBF-24-S	24 <sup>5</sup> / <sub>8</sub> "	25"	24 <sup>5</sup> / <sub>8</sub> "	25"
HCSBF-36-F	36 <sup>5</sup> / <sub>8</sub> "	37"	16"	16½"
HCSBF-36-I	36 <sup>5</sup> / <sub>8</sub> "	37"	20"	20½"
HCSBF-36-S	36 <sup>5</sup> / <sub>8</sub> "	37"	24 <sup>5</sup> / <sub>8</sub> "	25"
HCSBF-48-F	48 <sup>5</sup> / <sub>8</sub> "	49"	16"	16½"
HCSBF-48-I	48 <sup>5</sup> / <sub>8</sub> "	49"	20"	20½"
HCSBF48-S	48 <sup>5</sup> / <sub>8</sub> "	49"	24 <sup>5</sup> / <sub>8</sub> "	25"
<b>Control Box</b>	14 <sup>5</sup> / <sub>8</sub> "		7 <sup>3</sup> / <sub>4</sub> "	

ONE YEAR, ON-SITE PARTS AND LABOR WARRANTY. AN ADDITIONAL FOUR YEAR EXTENDED PARTS ONLY WARRANTY ON THE COMPRESSOR AVAILABLE AT THE TIME OF UNIT PURCHASE.



## Cold Shelves Built-In Flush Top

Hatco's Cold Built-In Flush Top Shelves are designed to keep your pre-chilled beverages, hors d'oeuvres, side dishes, buffet items and more in the perfect chill zone.

- Thermal break reduces condensation and temperature transfer (patent pending)
- Top mounted hard coat aluminum surface
- The CSBF Cold Built-In Shelves match the GRSBF Heated Built-In Shelves for a fully integrated look
- Long, flexible refrigerant line offers the ability to pullout condensing unit for service
- Easy serviceability with a sight glass, service valves, dryer/filter and a receiver
- Control comes standard with a 4' lead wire
- Control box can be mounted on the front of the cabinet, 4' from center of shelf
- Condensing unit may be mounted up to 4' away from the center of shelf
- Shelf construction utilizes R-404A refrigerant keeping food product cold



CSBF-48-S



### COLD SHELVES BUILT-IN FLUSH TOP (Aluminum Hardcoat)

Model	Dimensions W x D	Voltage		Approx. Ship Weight
		Single Phase	Watts	
CSBF-24-F	24" x 15½"	120	804	108 lbs.
CSBF-24-I	24" x 19½"	120	804	115 lbs.
CSBF-24-S	24" x 24"	120	804	122 lbs.
CSBF-36-F	36" x 15½"	120	804	130 lbs.
CSBF-36-I	36" x 19½"	120	1044	140 lbs.
CSBF-36-S	36" x 24"	120	1044	147 lbs.
CSBF-48-F	48" x 15½"	120	1044	154 lbs.
CSBF-48-I	48" x 19½"	120	1044	161 lbs.
CSBF-48-S	48" x 24"	120	1380	176 lbs.

**All Cold Shelf Built-In Flush Top Models Feature:**

Electronic Temperature Control and condensing unit, 6' cord and plug (NEMA 5-15P).

### OPTIONS (available at time of purchase only)

**EWC** Additional four year extended parts only warranty on the Compressor available at the time of unit purchase

### COUNTERTOP CUTOUT DIMENSIONS

Model	Width		Depth	
	Min	Max	Min	Max
CSBF-24-F	24¾"	25"	16"	16½"
CSBF-24-I	24¾"	25"	20"	20½"
CSBF-24-S	24¾"	25"	24¾"	25"
CSBF-36-F	36¾"	37"	16"	16½"
CSBF-36-I	36¾"	37"	20"	20½"
CSBF-36-S	36¾"	37"	24¾"	25"
CSBF-48-F	48¾"	49"	16"	16½"
CSBF-48-I	48¾"	49"	20"	20½"
CSBF-48-S	48¾"	49"	24¾"	25"
<b>Model</b>	<b>Width</b>		<b>Height</b>	
<b>Control Box</b>	9½"		7¾"	



ONE YEAR, ON-SITE PARTS AND LABOR WARRANTY. AN ADDITIONAL FOUR YEAR EXTENDED PARTS ONLY WARRANTY ON THE COMPRESSOR AVAILABLE AT THE TIME OF UNIT PURCHASE.



### Cold Shelves Undermount

Cold Shelves Undermount offer the same great performance as the Cold Built-In Flush Top Shelves, but are mounted directly against the underside of a granite, quartz, stainless steel or appropriate simulated stone counter top (no cut out required). Cooling transfers through the countertop to the top surface, without puncturing, for a true, seamless look.

- Mounts under appropriate countertop material (e.g. mount under a granite counter top 1 3/16" thick or less.)
- Aluminum surface
- Long, flexible refrigerant line offers the ability to pullout condensing unit for service
- Easy serviceability with a sight glass, service valves, dryer/filter and a receiver
- Control box can be mounted on the front of the cabinet, 4' from center of shelf
- Condensing unit may be mounted up to 4' away from the center of shelf
- Shelf construction utilizes R-404A refrigerant keeping food product cold



CSU-48-S



#### COLD SHELVES UNDERMOUNT (Aluminum)

Model	Dimensions W x D	Voltage		Approx. Ship Weight
		Single Phase	Watts	
CSU-24-F	24" x 15½"	120	804	108 lbs.
CSU-24-I	24" x 19½"	120	804	115 lbs.
CSU-24-S	24" x 24"	120	804	122 lbs.
CSU-36-F	36" x 15½"	120	804	130 lbs.
CSU-36-I	36" x 19½"	120	1044	140 lbs.
CSU-36-S	36" x 24"	120	1044	147 lbs.
CSU-48-F	48" x 15½"	120	1044	154 lbs.
CSU-48-I	48" x 19½"	120	1044	161 lbs.
CSU-48-S	48" x 24"	120	1380	176 lbs.


**All Cold Shelf Undermount Models Feature:**

Electronic Temperature Control and condensing unit.

\*Make structural modifications or add bracing underneath the countertop to ensure countertop will support the weight of the unit and its contents.

#### OPTIONS (available at time of purchase only)

**EWC** Additional four year extended parts only warranty on the Compressor available at the time of unit purchase

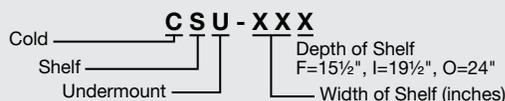

ONE YEAR, ON-SITE PARTS AND LABOR WARRANTY. AN ADDITIONAL FOUR YEAR EXTENDED PARTS ONLY WARRANTY ON THE COMPRESSOR AVAILABLE AT THE TIME OF UNIT PURCHASE.

## Glo-Ray® Built-In Rectangular Heated Simulated Stone Shelves

Match the heat zone to your countertops with Hatco's Glo-Ray® Heated Simulated Stone Shelves. The built-in foodsafe shelves are ideal for buffet lines or as hors d'oeuvre displays. These unique warmers will safely hold food hot while blending in with your décor.

- Shelves are made of approved foodsafe materials
- Shelves come in 3 Simulated Stone colors: Gray Granite, Bermuda Sand and Night Sky (standard) – non-standard colors are non-returnable
- Models with Simulated Stone are Swanstone®
- Features a lighted rocker switch and thermostatically-controlled heated base
- Includes control box with 3' conduit and 6' cord and plug



**GRSSB-3618** Built-In Heated Simulated Stone Shelf built into a Bermuda Sand Simulated Stone countertop



Standard control box

**NOTE:** For any size GRSSB, the next larger size GRA or GR2A Strip Heater will fit over the top. For example, a GRSSB-3018 will require a GRA-36 or GR2A-36. The GRA will have a tight fit to the frame of the base. The GR2A will have approx. a 4" space.

### BUILT-IN RECTANGULAR HEATED SIMULATED STONE SHELVES

Model <sup>^</sup>	Dimensions W x D x H	Voltage Single Phase	Watts	Plug	Ship Weight
<b>GRSSB-2418</b>	25 $\frac{5}{8}$ " x 19 $\frac{5}{8}$ " x 2 $\frac{1}{4}$ "	120	635	NEMA 5-15P	30 lbs.
<b>GRSSB-3018</b>	31 $\frac{5}{8}$ " x 19 $\frac{5}{8}$ " x 2 $\frac{1}{4}$ "	120	780	NEMA 5-15P	35 lbs.
<b>GRSSB-3618</b>	37 $\frac{5}{8}$ " x 19 $\frac{5}{8}$ " x 2 $\frac{1}{4}$ "	120	930	NEMA 5-15P	40 lbs.
<b>GRSSB-4818</b>	49 $\frac{5}{8}$ " x 19 $\frac{5}{8}$ " x 2 $\frac{1}{4}$ "	120	1270	NEMA 5-15P	51 lbs.
<b>GRSSB-6018</b>	61 $\frac{5}{8}$ " x 19 $\frac{5}{8}$ " x 2 $\frac{1}{4}$ "	120	1560	NEMA 5-20P	56 lbs.
<b>GRSSB-7218</b>	73 $\frac{5}{8}$ " x 19 $\frac{5}{8}$ " x 2 $\frac{1}{4}$ "	120	1860	NEMA 5-20P	70 lbs.

<sup>^</sup>Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 200°F.

#### All Built-In Rectangular Heated Simulated Stone Shelf Models Feature:

Cord Location: End of remote enclosure.

### OPTIONS (available at time of purchase only)

#### Designer Colors (Flush Mount Control Box Bezel) – Non-standard colors are non-returnable –

<b>RED</b>	Warm Red
<b>BLACK</b>	Black
<b>GRAY</b>	Gray Granite
<b>WHITE</b>	White Granite
<b>NAVY</b>	Navy Blue
<b>GREEN</b>	Hunter Green
<b>COPPER</b>	Antique Copper

#### Simulated Stone Colors – Non-standard colors are non-returnable – Night Sky Standard –

<b>SS-GGRAN</b>	Gray Granite
<b>SS-BSAND</b>	Bermuda Sand
<b>SS-NSKY</b>	Night Sky
<b>GRSSB-FLUSH-ITC</b>	Flush Mount Electronic Control Box with Lighted Power Switch
<b>GRSSB-FLUSH-TSTAT</b>	Flush Mount Thermostatic Control Box with Lighted Power Switch
<b>COND-6</b>	6' Conduit in lieu of standard 3' (used with Flush Mount ITC Control Box)
<b>COND-10</b>	10' Conduit in lieu of standard 3' (used with Flush Mount ITC Control Box)
<b>GRSSB-REC</b>	Built-In Heated Simulated Stone Shelf with Recessed Top

Optional **GRSSB-FLUSH-ITC** flush mount recessed *electronic* control box with lighted On/Off rocker switch and angled recessed controls



Optional **GRSSB-FLUSH-TSTAT** flush mount recessed *thermostatic* control box with lighted On/Off rocker switch and angled recessed controls

### COLORS AND FINISHES – PAGE 11


### BUILT-IN RECTANGULAR HEATED SIMULATED STONE COUNTERTOP CUTOUT DIMENSIONS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
<b>GRSSB-2418</b>	24 $\frac{5}{8}$ "	24 $\frac{7}{8}$ "	18 $\frac{5}{8}$ "	18 $\frac{7}{8}$ "
<b>GRSSB-3018</b>	30 $\frac{5}{8}$ "	30 $\frac{7}{8}$ "	18 $\frac{5}{8}$ "	18 $\frac{7}{8}$ "
<b>GRSSB-3618</b>	36 $\frac{5}{8}$ "	36 $\frac{7}{8}$ "	18 $\frac{5}{8}$ "	18 $\frac{7}{8}$ "
<b>GRSSB-4818</b>	48 $\frac{5}{8}$ "	48 $\frac{7}{8}$ "	18 $\frac{5}{8}$ "	18 $\frac{7}{8}$ "
<b>GRSSB-6018</b>	60 $\frac{5}{8}$ "	60 $\frac{7}{8}$ "	18 $\frac{5}{8}$ "	18 $\frac{7}{8}$ "
<b>GRSSB-7218</b>	72 $\frac{5}{8}$ "	72 $\frac{7}{8}$ "	18 $\frac{5}{8}$ "	18 $\frac{7}{8}$ "

### OPTIONAL CONTROL BOX CUTOUT DIMENSIONS

Model	Width	Height	Depth
<b>GRSSB-FLUSH-ITC</b>	5 $\frac{7}{8}$ "	6 $\frac{3}{8}$ "	4 $\frac{3}{4}$ "
<b>GRSSB-FLUSH-TSTAT</b>	5 $\frac{7}{8}$ "	6 $\frac{3}{8}$ "	4"

ALL GLO-RAY® BLANKET HEATING ELEMENTS  
WARRANTED AGAINST BURNOUT FOR ONE YEAR.

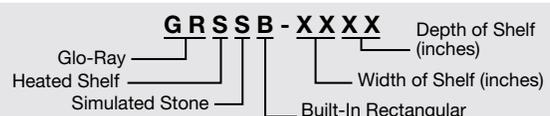



## Built-In Rectangular Heated Black Glass Shelves

Hatco Heated Black Glass Shelves have a heated ceramic glass top to create uniform heat across the entire surface and are made of approved foodsafe materials. Adjustable thermostatic controls allow surface temperature to be controlled easily.

- Shelves are made of approved foodsafe materials
- Equipped with an attached stainless steel (standard) trim mounting ring (*Designer Black* available)



Standard control box

- Includes control box with 3' conduit and 6' cord and plug
- Lighted On/Off rocker switch



**HBGB-2418** with optional *Designer Black* Trim Ring

**NOTE:** For any size HBGB, the next larger size GRA or GR2A Strip Heater will fit over the top. For example, a HBGB-3018 will require a GRA-36 or GR2A-36. The GRA will have a tight fit to the frame of the base. The GR2A will have approximately a 4" space.

### BUILT-IN RECTANGULAR HEATED BLACK GLASS SHELVES

Model <sup>^</sup>	Dimensions W x D x H	Voltage Single Phase	Watts	Plug	Ship Weight
<b>HBGB-2418</b>	25 <sup>3</sup> / <sub>4</sub> " x 19 <sup>3</sup> / <sub>4</sub> " x 2 <sup>1</sup> / <sub>4</sub> "	120	425	NEMA 5-15P	32 lbs.
<b>HBGB-3018</b>	31 <sup>3</sup> / <sub>4</sub> " x 19 <sup>3</sup> / <sub>4</sub> " x 2 <sup>1</sup> / <sub>4</sub> "	120	525	NEMA 5-15P	37 lbs.
<b>HBGB-3618</b>	37 <sup>3</sup> / <sub>4</sub> " x 19 <sup>3</sup> / <sub>4</sub> " x 2 <sup>1</sup> / <sub>4</sub> "	120	630	NEMA 5-15P	40 lbs.
<b>HBGB-4818<sup>+</sup></b>	49 <sup>3</sup> / <sub>4</sub> " x 19 <sup>3</sup> / <sub>4</sub> " x 2 <sup>1</sup> / <sub>4</sub> "	120	850	NEMA 5-15P	50 lbs.
<b>HBGB-6018<sup>+</sup></b>	61 <sup>3</sup> / <sub>4</sub> " x 19 <sup>3</sup> / <sub>4</sub> " x 2 <sup>1</sup> / <sub>4</sub> "	120	1050	NEMA 5-15P	63 lbs.
<b>HBGB-7218<sup>+</sup></b>	73 <sup>3</sup> / <sub>4</sub> " x 19 <sup>3</sup> / <sub>4</sub> " x 2 <sup>1</sup> / <sub>4</sub> "	120	1260	NEMA 5-15P	74 lbs.

<sup>^</sup>Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 200°F.

<sup>+</sup> Units 48" and larger are constructed of two equal sized pieces of glass which create a seam.

**All Built-In Rectangular Heated Black Glass Shelf Models Feature:**

**Cord Location:** End of remote enclosure.

### OPTIONS (available at time of purchase only)

**Designer Colors (Flush Mount Control Box Bezel) – BLACK**

<b>HBGB-TRIM-BLK</b>	Designer Black Powdercoated Trim Ring
<b>HBGB-FLUSH-ITC</b>	Flush Mount Electronic Control Box with Lighted Power Switch (120V only)
<b>HBGB-FLUSH-TSTAT</b>	Flush Mount Thermostatic Control Box with Lighted Power Switch
<b>COND-6</b>	6' Conduit in lieu of standard 3' (used with Flush Mount ITC Control Box)
<b>COND-10</b>	10' Conduit in lieu of standard 3' (used with Flush Mount ITC Control Box)
<b>HBGB-REC</b>	Built-In Heated Black Glass Shelf with Recessed Top

Optional **HBGB-FLUSH-ITC** flush mount recessed *electronic* control box with lighted On/Off rocker switch and angled recessed controls




Optional **HBGB-FLUSH-TSTAT** flush mount recessed *thermostatic* control box with lighted On/Off rocker switch and angled recessed controls

### BUILT-IN HEATED BLACK GLASS COUNTERTOP CUTOUT DIMENSIONS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
<b>HBGB-2418</b>	24 <sup>5</sup> / <sub>8</sub> "	24 <sup>7</sup> / <sub>8</sub> "	18 <sup>5</sup> / <sub>8</sub> "	18 <sup>7</sup> / <sub>8</sub> "
<b>HBGB-3018</b>	30 <sup>3</sup> / <sub>8</sub> "	30 <sup>5</sup> / <sub>8</sub> "	18 <sup>3</sup> / <sub>8</sub> "	18 <sup>5</sup> / <sub>8</sub> "
<b>HBGB-3618</b>	36 <sup>5</sup> / <sub>8</sub> "	36 <sup>7</sup> / <sub>8</sub> "	18 <sup>5</sup> / <sub>8</sub> "	18 <sup>7</sup> / <sub>8</sub> "
<b>HBGB-4818</b>	48 <sup>3</sup> / <sub>8</sub> "	48 <sup>5</sup> / <sub>8</sub> "	18 <sup>3</sup> / <sub>8</sub> "	18 <sup>5</sup> / <sub>8</sub> "
<b>HBGB-6018</b>	60 <sup>5</sup> / <sub>8</sub> "	60 <sup>7</sup> / <sub>8</sub> "	18 <sup>5</sup> / <sub>8</sub> "	18 <sup>7</sup> / <sub>8</sub> "
<b>HBGB-7218</b>	72 <sup>3</sup> / <sub>8</sub> "	72 <sup>5</sup> / <sub>8</sub> "	18 <sup>3</sup> / <sub>8</sub> "	18 <sup>5</sup> / <sub>8</sub> "

### OPTIONAL CONTROL BOX CUTOUT DIMENSIONS

Model	Width	Height	Depth
<b>HBGB-FLUSH-ITC</b>	5 <sup>7</sup> / <sub>8</sub> "	6 <sup>3</sup> / <sub>8</sub> "	4 <sup>7</sup> / <sub>8</sub> "
<b>HBGB-FLUSH-TSTAT</b>	5 <sup>7</sup> / <sub>8</sub> "	6 <sup>3</sup> / <sub>8</sub> "	4"

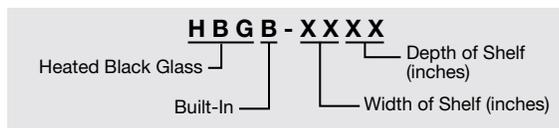

ALL GLO-RAY® BLANKET HEATING ELEMENTS WARRANTED AGAINST BURNOUT FOR ONE YEAR.

## Glo-Ray® Built-In Rectangular Heated Shelves with Recessed Top

Let Hatco add heat to your serving surface with the Glo-Ray® Rectangular Built-In Heated Shelf. This 1/2" recessed top foodwarmer has a hardcoated aluminum surface and blanket-type element for uniform heat to extend your food holding time.

- Uniform heat distribution with hardcoated aluminum surface and blanket-type element
- 3' flexible conduit channels power lines from the shelf to a control box

- Enclosure includes control thermostat, an illuminated power switch and mounting brackets
- Thermostatically-controlled heated base



Standard control box



GRSB-24-I

**NOTE:** For any size GRSB, the next larger size GRA or GR2A Strip Heater will fit over the top. For example, a GRSB-30 will require a GRA-36 or GR2A-36. The GRA will have a tight fit to the frame of the base. The GR2A will have approximately a 4" space.

### BUILT-IN RECTANGULAR HEATED SHELVES WITH RECESSED TOP

Model <sup>^</sup>	Dimensions W x D x H	Cut-Out Dimensions		Voltage Single Phase	Watts	Ship Weight
		Min.-Max. Width	Min.-Max. Depth			
GRSB-24-F	25 1/2" x 17" x 2 7/8"	24 1/2"-24 3/4"	16"-16 1/4"	120	420	20 lbs.
GRSB-24-I	25 1/2" x 21" x 2 7/8"	24 1/2"-24 3/4"	20"-20 1/4"	120	550	22 lbs.
GRSB-24-O	25 1/2" x 31 1/2" x 2 7/8"	24 1/2"-24 3/4"	30 1/2"-30 3/4"	120	790	26 lbs.
GRSB-30-F	31 1/2" x 17" x 2 7/8"	30 1/2"-30 3/4"	16"-16 1/4"	120	505	23 lbs.
GRSB-30-I	31 1/2" x 21" x 2 7/8"	30 1/2"-30 3/4"	20"-20 1/4"	120	665	25 lbs.
GRSB-30-O	31 1/2" x 31 1/2" x 2 7/8"	30 1/2"-30 3/4"	30 1/2"-30 3/4"	120	950	28 lbs.
GRSB-36-F	37 1/2" x 17" x 2 7/8"	36 1/2"-36 3/4"	16"-16 1/4"	120	590	26 lbs.
GRSB-36-I	37 1/2" x 21" x 2 7/8"	36 1/2"-36 3/4"	20"-20 1/4"	120	780	29 lbs.
GRSB-36-O	37 1/2" x 31 1/2" x 2 7/8"	36 1/2"-36 3/4"	30 1/2"-30 3/4"	120	1110	32 lbs.
GRSB-42-F	43 1/2" x 17" x 2 7/8"	42 1/2"-42 3/4"	16"-16 1/4"	120	685	29 lbs.
GRSB-42-I	43 1/2" x 21" x 2 7/8"	42 1/2"-42 3/4"	20"-20 1/4"	120	885	32 lbs.
GRSB-42-O	43 1/2" x 31 1/2" x 2 7/8"	42 1/2"-42 3/4"	30 1/2"-30 3/4"	120	1270	35 lbs.
GRSB-48-F	49 1/2" x 17" x 2 7/8"	48 1/2"-48 3/4"	16"-16 1/4"	120	770	33 lbs.
GRSB-48-I	49 1/2" x 21" x 2 7/8"	48 1/2"-48 3/4"	20"-20 1/4"	120	1000	36 lbs.
GRSB-48-O	49 1/2" x 31 1/2" x 2 7/8"	48 1/2"-48 3/4"	30 1/2"-30 3/4"	120	1430	39 lbs.
GRSB-54-I	55 1/2" x 21" x 2 7/8"	54 1/2"-54 3/4"	20"-20 1/4"	120	1110	43 lbs.
GRSB-60-F	61 1/2" x 17" x 2 7/8"	60 1/2"-60 3/4"	16"-16 1/4"	120	950	45 lbs.
GRSB-60-I	61 1/2" x 21" x 2 7/8"	60 1/2"-60 3/4"	20"-20 1/4"	120	1220	50 lbs.
GRSB-60-O	61 1/2" x 31 1/2" x 2 7/8"	60 1/2"-60 3/4"	30 1/2"-30 3/4"	120	1750	54 lbs.
GRSB-66-I	67 1/2" x 21" x 2 7/8"	66 1/2"-66 3/4"	20"-20 1/4"	120	1330	54 lbs.
GRSB-72-F	73 1/2" x 17" x 2 7/8"	72 1/2"-72 3/4"	16"-16 1/4"	120	1130	52 lbs.
GRSB-72-I	73 1/2" x 21" x 2 7/8"	72 1/2"-72 3/4"	20"-20 1/4"	120	1440	58 lbs.
GRSB-72-O	73 1/2" x 31 1/2" x 2 7/8"	72 1/2"-72 3/4"	30 1/2"-30 3/4"	208, 240	2070	64 lbs.

<sup>^</sup>Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 200°F.

#### All Built-In Rectangular Heated Shelf with Recessed Top Models Feature:

Plugs: All models ending in -F and -I and models 24" through 48" wide ending in -O: NEMA 5-15P.


GRSB-60-O: NEMA 5-20P.

GRSB-72-O: NEMA 6-15P.

Usable Heated Shelf Space: Width of unit minus 1 1/2" x depth of unit minus 1 1/2".

Cord Location: End of remote enclosure.

ALL GLO-RAY® BLANKET HEATING ELEMENTS WARRANTED AGAINST BURNOUT FOR ONE YEAR.

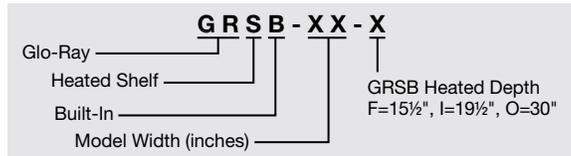

### OPTIONS (available at time of purchase only)

#### Designer Colors (Flush Mount Control Box Bezel only) – Non-standard colors are non-returnable –

RED	Warm Red	WHITE	White Granite	COPPER	Antique Copper
BLACK	Black	NAVY	Navy Blue		
GRAY	Gray Granite	GREEN	Hunter Green		
GRSB-FLUSH-ITC	Flush Mount Electronic Control Box with Lighted Power Switch*				
GRSB-FLUSH-TSTAT	Flush Mount Thermostatic Control Box with Lighted Power Switch*				
COND-6	6' Conduit in lieu of standard 3' (used with Flush Mount ITC Control Box)				
COND-10	10' conduit in lieu of standard 3' (used with Flush Mount ITC Control Box)				

\* See page 7 for Control Box cutout dimensions.

**FOOD PANS AND TRIVETS – PAGE 11**  
**COLORS AND FINISHES – PAGE 11**

Optional **GRSB-FLUSH-ITC** flush mount recessed *electronic* control box with lighted On/Off rocker switch and angled recessed controls



Optional **GRSB-FLUSH-TSTAT** flush mount recessed *thermostatic* control box with lighted On/Off rocker switch and angled recessed controls





## Glo-Ray® Built-In Rectangular Heated Shelves with Flush Top

Let Hatco add heat to your serving surface with the Glo-Ray® Built-In Rectangular Heated Shelf. This flush top foodwarmer has a hardcoated aluminum surface and blanket-type element for uniform heat to extend your food holding time.

- Uniform heat distribution with hardcoated aluminum surface and blanket-type element
- 3' flexible conduit channels power lines from the shelf to a control box
- Thermostatically-controlled heated base
- Enclosure includes control thermostat, an illuminated power switch and mounting brackets
- Model widths from 25½" to 73½"
- Optional stainless steel surface

**NOTE:** For any size GRSBF, the next larger size GRA or GR2A Strip Heater will fit over the top. For example, a GRSBF-30 will require a GRA-36 or GR2A-36. The GRA will have a tight fit to the frame of the base. The GR2A will have approx. a 4" space.



**GRSBF-60-0** Glo-Ray® Built In Heated Shelf with Flush Top, built into a Bermuda Sand Simulated Stone countertop with accessory pans shown below a **GR2AL-96D** in *Designer Black* with optional sneeze guards



Standard control box

### BUILT-IN RECTANGULAR HEATED SHELVES WITH FLUSH TOP

Model <sup>^</sup>	Dimensions W x D x H	Cut-Out Dimensions		Voltage		Ship Weight
		Min.-Max. Width	Min.-Max. Depth	Single Phase	Watts	
GRSBF-24-F	25½" x 17" x 2¼"	24½"-24¾"	16"-16¼"	120	420	20 lbs.
GRSBF-24-I	25½" x 21" x 2¼"	24½"-24¾"	20"-20¼"	120	550	22 lbs.
GRSBF-24-S	25½" x 25½" x 2¼"	24½"-24¾"	24½"-24¾"	120	700	24 lbs.
GRSBF-24-O	25½" x 31½" x 2¼"	24½"-24¾"	30½"-30¾"	120	790	26 lbs.
GRSBF-30-F	31½" x 17" x 2¼"	30½"-30¾"	16"-16¼"	120	505	23 lbs.
GRSBF-30-I	31½" x 21" x 2¼"	30½"-30¾"	20"-20¼"	120	665	25 lbs.
GRSBF-30-S	31½" x 25½" x 2¼"	30½"-30¾"	24½"-24¾"	120	825	26 lbs.
GRSBF-30-O	31½" x 31½" x 2¼"	30½"-30¾"	30½"-30¾"	120	950	28 lbs.
GRSBF-36-F	37½" x 17" x 2¼"	36½"-36¾"	16"-16¼"	120	590	26 lbs.
GRSBF-36-I	37½" x 21" x 2¼"	36½"-36¾"	20"-20¼"	120	780	28 lbs.
GRSBF-36-S	37½" x 25½" x 2¼"	36½"-36¾"	24½"-24¾"	120	950	31 lbs.
GRSBF-36-O	37½" x 31½" x 2¼"	36½"-36¾"	30½"-30¾"	120	1110	32 lbs.
GRSBF-42-F	43½" x 17" x 2¼"	42½"-42¾"	16"-16¼"	120	685	29 lbs.
GRSBF-42-I	43½" x 21" x 2¼"	42½"-42¾"	20"-20¼"	120	885	32 lbs.
GRSBF-42-S	43½" x 25½" x 2¼"	42½"-42¾"	24½"-24¾"	120	1100	34 lbs.
GRSBF-42-O	43½" x 31½" x 2¼"	42½"-42¾"	30½"-30¾"	120	1270	35 lbs.
GRSBF-48-F	49½" x 17" x 2¼"	48½"-48¾"	16"-16¼"	120	770	33 lbs.
GRSBF-48-I	49½" x 21" x 2¼"	48½"-48¾"	20"-20¼"	120	1000	36 lbs.
GRSBF-48-S	49½" x 25½" x 2¼"	48½"-48¾"	24½"-24¾"	120	1225	38 lbs.
GRSBF-48-O	49½" x 31½" x 2¼"	48½"-48¾"	30½"-30¾"	120	1430	39 lbs.
GRSBF-60-F	61½" x 17" x 2¼"	60½"-60¾"	16"-16¼"	120	950	45 lbs.
GRSBF-60-I	61½" x 21" x 2¼"	60½"-60¾"	20"-20¼"	120	1220	50 lbs.
GRSBF-60-S	61½" x 25½" x 2¼"	60½"-60¾"	24½"-24¾"	120	1500	53 lbs.
GRSBF-60-O	61½" x 31½" x 2¼"	60½"-60¾"	30½"-30¾"	120	1750	54 lbs.
GRSBF-72-F	73½" x 17" x 2¼"	72½"-72¾"	16"-16¼"	120	1130	52 lbs.
GRSBF-72-I	73½" x 21" x 2¼"	72½"-72¾"	20"-20¼"	120	1440	58 lbs.
GRSBF-72-S	73½" x 25½" x 2¼"	72½"-72¾"	24½"-24¾"	120	1750	62 lbs.
GRSBF-72-O	73½" x 31½" x 2¼"	72½"-72¾"	30½"-30¾"	208, 240	2070	64 lbs.

<sup>^</sup>Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 200°F.

#### All Built-In Rectangular Heated Shelves with Flush Top Models Feature:


Plugs: All models ending in -F and -I and models 24" through 48" wide ending in -S and -O: NEMA 5-15P.

GRSBF-60-S, GRSBF-60-O and GRSBF-72-S: NEMA 5-20P. GRSBF-72-O: NEMA 6-15P.

Usable Heated Shelf Space: Entire surface.

Cord Location: End of remote enclosure.

ALL GLO-RAY® BLANKET HEATING ELEMENTS WARRANTED AGAINST BURNOUT FOR ONE YEAR.

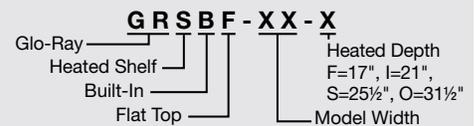

### OPTIONS (available at time of purchase only)

**Designer Colors (Flush Mount Control Box Bezel only) – Non-standard colors are non-returnable –**

<b>RED</b> Warm Red	<b>WHITE</b> White Granite	<b>COPPER</b> Antique Copper
<b>BLACK</b> Black	<b>NAVY</b> Navy Blue	
<b>GRAY</b> Gray Granite	<b>GREEN</b> Hunter Green	

<b>GRSBF-SS</b>	Stainless Steel Surface in lieu of Hardcoat (GRSBF Models only)
<b>GRSB-FLUSH-ITC</b>	Flush Mount Electronic Control Box with Lighted Power Switch*
<b>GRSB-FLUSH-TSTAT</b>	Flush Mount Thermostatic Control Box with Lighted Power Switch*
<b>COND-6</b>	6' Conduit in lieu of standard 3' (used with Flush Mount ITC Control Box)
<b>COND-10</b>	10' Conduit in lieu of standard 3' (used with Flush Mount ITC Control Box)

\* See page 7 for Control Box cutout dimensions.

**FOOD PANS AND TRIVETS – PAGE 11**

**COLORS AND FINISHES – PAGE 11**

Optional **GRSB-FLUSH-ITC** flush mount recessed *electronic* control box with lighted On/Off rocker switch and angled recessed controls



Optional **GRSB-FLUSH-TSTAT** flush mount recessed *thermostatic* control box with lighted On/Off rocker switch and angled recessed controls



## Food Pans And Trivets



ALUM PAN

18"SHEET PAN



PIZZA PANS  
14"PIZZA PAN  
16"PIZZA PAN  
18"PIZZA PAN




ST PANS  
ST PAN 1/3  
ST PAN 1/2  
ST PAN 2  
ST PAN 4

### FOOD PANS

Model	Description
ALUM PAN	Half-Size Sheet Pan – 18"W x 13"D
18"SHEET PAN	Full-Size Sheet Pan – 18"W x 26"D
14"PIZZA PAN	Perforated Pizza Pan – 14" Diameter
16"PIZZA PAN	Perforated Pizza Pan – 16" Diameter
18"PIZZA PAN	Perforated Pizza Pan – 18" Diameter
ST PAN 1/3	Third-Size Stainless Steel Pan – 12¾"W x 6⅞"D x 2½"H
ST PAN 1/2	Half-Size Stainless Steel Pan – 12¾"W x 10⅝"D x 2½"H
ST PAN 2	Full-Size Stainless Steel Pan – 12¾"W x 20¾"D x 2½"H
ST PAN 4	Full-Size Stainless Steel Pan – 12¾"W x 20¾"D x 4"H

### TRIVETS

Model	Description
Wire Trivets Stainless – TRIVET (1/2)SS	Half-Size – 10⅞"W x 7⅞"D
TRIVET SS	Full Size – 10⅞"W x 18"D

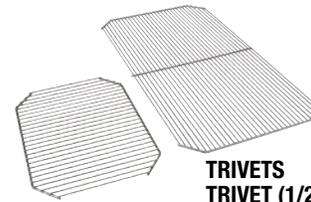

TRIVETS  
TRIVET (1/2)SS  
TRIVET SS

## Paint Chip and Stone Sample Colors

### DESIGNER COLORS



Warm Red

Black

Gray  
Granite

White  
Granite

Navy  
Blue

Hunter  
Green

Antique  
Copper

### HEATED STONE COLORS\*



Gray  
Granite

Bermuda  
Sand

Night Sky

*Colors are a representation and may not exactly match our colors. Consult factory for possible color matching options on these colors. Non-standard colors are non-returnable.*

To order a Hatco Paint Chip & Stone Sample Colors Sheet, visit [www.hatcocorp.com](http://www.hatcocorp.com) / Order Literature / Sales Literature / Sell Sheets.

\* Simulated Stone



Scan with web-enabled  
mobile device to visit  
[www.hatcocorp.com](http://www.hatcocorp.com)



**Hatco Corporation**

P.O. Box 340500 | Milwaukee WI 53234-0500 USA  
800-558-0607 | 414-671-6350 | Fax: 800-543-7521  
[www.hatcocorp.com](http://www.hatcocorp.com) | [equipsales@hatcocorp.com](mailto:equipsales@hatcocorp.com)